

JOYO

www.joyochina.cn

## 数字无线音频 发送、接收器

### JW-07 用户使用说明



#### 一、注意事项

- 切勿擅自拆卸、改装、修理机器，以免发生短路。
- 勿在高温、潮湿、污浊、强烈震动处使用机器。
- 勿将机器摔落，或落在坚硬物体表面，以免机器操作失常。
- 勿用酒精等稀释性液体擦洗机器表面，以免机器受损。
- 发射器和接收器一定要配对才能正常工作，支持一对一和一对多方式。
- 为保证本机正常工作，发射器或接收器不要太过接近无线路由器等无线设备。
- 在发射器和接收器之间如有大障碍物，可能会影响传输距离。
- 在同一区域内本品最多可以同时使用四对。
- 工作过程中如机器处于低电，此时传输距离和效果会受到低电的影响，请及时充电。
- 不使用时请务必把发射器和接收器电源关掉，避免影响电池的寿命和性能。
- 出于锂电池的特性，电池会有微弱自放电现象，长时间不使用请在两个月内充电，以防电池进入低电保护状态。
- 出于锂电池的特性，随着充放电次数的增加，电池容量会有缓慢下降，产品的最大使用时间会相应下降。


#### 二、规格参数

- 48K/16bit高品质信号
- 低延迟：<5mS
- 有效距离：大于20米的使用距离
- 频响：10Hz-22KHz +-1dB
- 失真度：<0.02% (@1KHz-10dBFS)
- 使用频段：2.4GHz ISM频段
- 抗干扰方式：跳频
- 信道数量：12个信道分4组
- 电池：内置锂电池，一次充满可续航大于8小时

#### 技术规格

电池：可充电锂电池3.7V/500mAh  
频响：10Hz-22KHz  
无线频段：2.4GHz ISM频段  
随机附件：说明书，USB充电线

#### 三、产品示意图及介绍

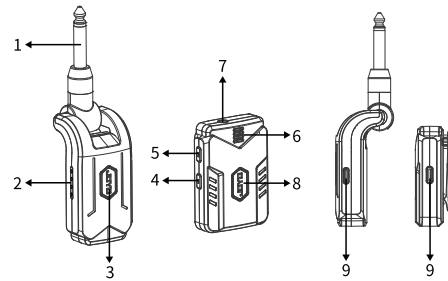


- 6.35音频信号输入插头
- 电量及充电指示灯
- 功能按键及信道指示灯
- 音量 - 按键
- 音量 + 按键
- 电量、音量及充电指示灯
- 3.5MM耳机接口
- 功能按键及信道指示灯
- 充电口

#### 四、使用方式

##### 1.查看电量


实时的电量由绿色灯指示如下



当只有一个绿灯闪烁时表示当前电量低，应尽快充电以防自动关机。

##### 2.充电


请在使用附赠的充电线连接电脑USB接口或使用5V/1A USB充电器为本产品充电。

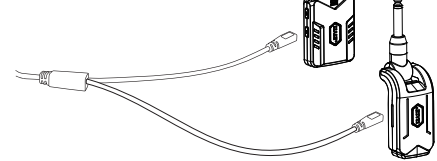


正在充电时红色指示灯被点亮，充满后会熄灭。

#### 3.连接方式

①发射器开机并接入音源设备

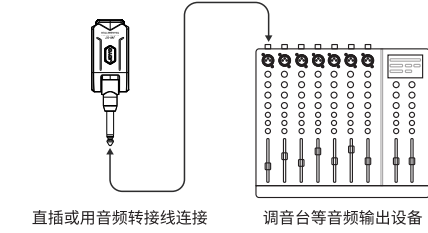

②接收器开机并插入耳机或音箱等设备

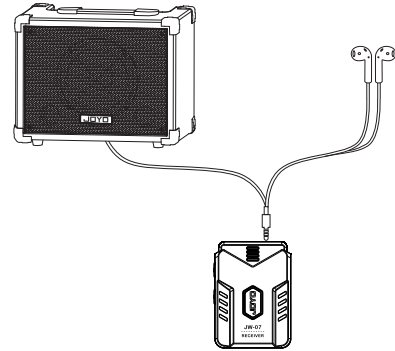

#### 4.调节音量


点按音量 - 或音量+ 按键，电量指示灯会变为黄色来指示当前的音量（共16级）。当四个灯一起闪烁表示当前已是最大音量，一个黄灯闪烁表示音前已是最小音量且耳机被静音。

#### 5.切换信道

如果当前使用的信道遇到了干扰或是多对一起使用，则需要手动切换信道。信道指示灯以红、绿、蓝、白四个颜色表示当前信道，每点按一次切换一个信道。

#### 6.重新配对

先双击接收器功能按键进入配对模式，接收器白灯闪烁。此时双击发射器功能按键进入配对模式，发射器的白灯闪烁。如果配对成功，发射器和接收器都会退出配对。

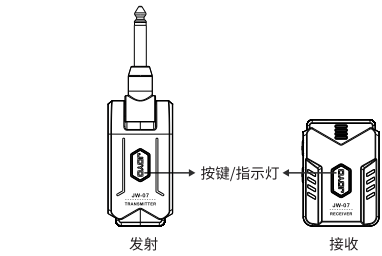

\* 出厂时每一对都已经做了配对，一般不需要重新配对。

#### 卓乐产品服务政策

一、在正常使用使用过程中，如果出现非人为损坏的性能故障，自购买之日起，消费者享有保修服务，保修期为12个月。  
二、有下列情况之一者，消费者不能享受保修权益。  
1、人为损坏；2、超过保修期；3、无保修卡及有效发票，但能够证明产品在保修期内的除外；4、保修卡与产品型号不符，或保修卡被涂改；5、未按说明书要求使用、维护、保养而造成产品损坏；6、未经卓乐公司授权，擅自拆卸、维修产品、或浸水、摔坏产品；7、其他不可抗力造成的损坏。  
三、卓乐服务信息  
消费者服务热线：0755-29765390  
更多信息请访问：www.joyochina.cn



#### 卓乐产品保修卡

产品型号	SN号码
姓名	购机日期
电话	
地址	
发票号码	
名称（加盖公章）	
地址	
电话	

#### 产品合格证

检验结论 合格  
检验员号 QC 01  
日期

品牌:JOYO 名称: 无线系统  
执行标准 :EN 300636-2001  
制造商: 深圳市卓乐科技有限公司  
地址: 广东省深圳市宝安28区新安三路陆氏工业大厦2楼  
邮编:518133  
售后服务热线：0755-29765390

JOYO

www.joyoaudio.com

## Digital Wireless Transmitter & Receiver

### JW-07 Owner's manual



#### I . Important Notes

- Do not disassemble or repair this product by yourself.
- Do not use or store it to any heat sources, damp, dusty areas. Avoid violent vibrations or shock.
- Do not drop this product otherwise it may malfunction.
- Do not use alcohol or other cleaning fluids to clean this product.
- This product works normally only when the transmitter and the receiver pairs up.It supports one-to-one and one-to-many.
- Please make sure the transmitter and the receiver keep a distance away from wireless router or other wireless equipments during use.
- Obstructions between the transmitter and the receiver may affect the transmission distance.
- A maximum of 4 sets of transmitters and receivers can be used in the same place simultaneously.
- During use, if JW-07 is in low battery, pls charge it in time as the transmission distance and transmission quality will be interfered by low battery.
- Please turn off the transmitter and the receiver when not in use.
- Due to one of the characteristics of lithium battery, there is a slight self-discharge.Therefore please charge the battery in 2 months so as to avoid low battery protection.
- The lithium battery capacity decreases gradually after repeated charge and discharge, so this product's lifetime will be affected within acceptable degree with time.


#### II . Parameters

- 48K/16bit audio resolution
- Delay time: <5mS
- Transmission distance>20m
- Frequency response:10Hz-22KHz+-1dB
- Distortion:<0.02%(@1KHz-10dBFS)
- Wireless frequency band: 2.4GHz ISM frequency band
- Anti-interference method: Frequency hopping
- Channel bank' s quantity: 12, divided into 4 groups
- Built-in lithium battery: Over 8 hrs battery life once fully charged

#### Specifications

Battery: Rechargeable lithium battery 3.7V/500mAh  
Frequency response: 10Hz-22KHz  
Wireless frequency band: 2.4GHz ISM frequency band  
Attached accessories: Owner's manual, USB cable

#### III. Product diagram and introduction

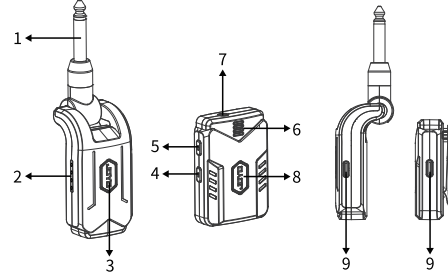


- 6.35 Audio Signal Input Jack
- Battery Level and Charging Indicator
- Function Button and Channel Bank Indicator
- Volume - button
- Volume + button
- Battery level, Volume and Charging Indicator
- 3.5mm Headphone Jack
- Function Button and Channel Bank Indicator
- Charging Port

#### IV. How to use?

##### 1.Check up the battery level


The green indicator indicates the real-time battery level as below:



It means low battery when 1 LED is flickering in green, pls charge it in time so as to avoid automatic shutdown.

##### 2.Charge


Pls charge JW-07 with the attached charging cable connecting to the computer' s USB port or via 5V/1A USB charger.

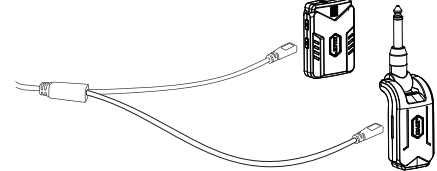


The red indicator is lit while charging, and it goes out once fully charged.

#### 3.How to connect?

①Turn on the transmitter and connect it to audio source devices.

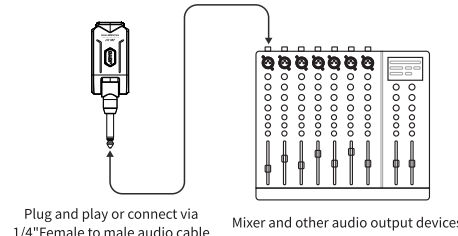

②Turn on the receiver and plug in the earphones or the amp, etc.

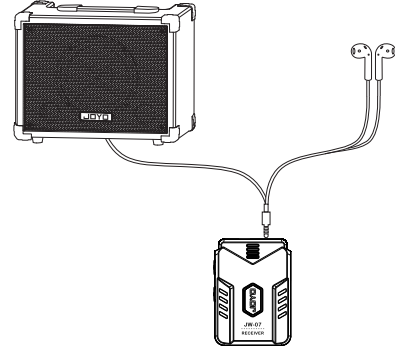

#### 4.Adjust the VOLUME


Tap the Volume - button or Volume + button, the Volume Indicator changes into yellow, indicating the current Volume(16 levels in all). It means the maximum Volume when all the 4 LEDs are flickering, when 1 LED is flickering in yellow, it means the current Volume is the minimum, and the earphones are muted.

#### 5.Switch the Channel banks

If the current Channel banks in use encounter interference or multiple pairs of them are in use simultaneously, you need to switch the Channel banks manually. The indicator will be in red, green, blue and white, indicating the current Channel bank, tap it once, and you can change 1 Channel bank.

#### 6.Pair up all over again

Double click the receiver' s function button and enter pairing up mode, the receiver' s white LED is flickering. Now double click the transmitter' s function button and enter pairing up mode, the transmitter' s white LED is flickering. If they' re paired up successfully, both the transmitter and the receiver will exit pairing up mode.

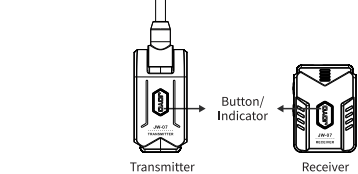

\*Each pair of transmitter and receiver has been paired up as factory settings, so normally no need to pair up all over again.

JOYO

JOYOTECHNOLOGY CO.,LTD

Address: 2/F, Lushi Industry Building, 28th District, Bao'an, Shenzhen, 518101 China.  
www.joyoaudio.com Email:info@joyoaudio.com Tel: 0086-755-29765381